

„Regumaq X-30“

138 10 60

Wilo RS 15 6/3

: „Just in Time“
: 20-45 / , 30

: 30-60 °C

: G 1,

PN 10 (20 °C), 120 °C

10

2 KFE,

2 KFE,

():


: 500

: 860

: 260

KFE.

10

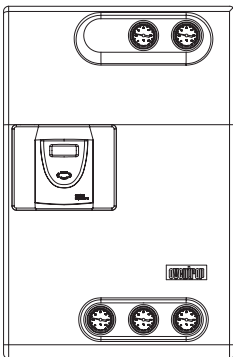

„Regumaq XZ-30“

138 10 65

Wilo RS 15 6/3

Wilo ZRS 15/4-3KU

„Regumaq X“,



20

30


„Regumaq“ „Regusol X“

15

25

135 17 90

135 17 91

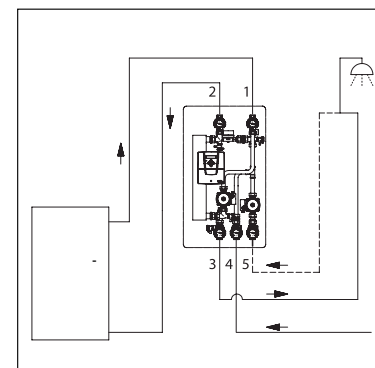

1

2

3

4

5

(Regumaq XZ)