

kv 1K kv 2K kvs

M 30 x 1,5

: 10 (PN 10)
: 2 °C - 120 °C
(130 °C).

„E”

Oventrop


„E”

„Combi E” -

„AV6” . 1.29.


:

„Demo-Bloc” . 1.52,




15

0,32	0,65	0,90	116 30 32
0,32	0,65	0,90	116 30 42
0,32	0,65	0,90	116 30 52
0,32	0,65	0,90	116 30 62
0,32	0,65	0,90	116 30 72
0,32	0,65	0,90	116 30 82




15

0,32	0,65	0,90	116 31 32
0,32	0,65	0,90	116 31 42
0,32	0,65	0,90	116 31 52
0,32	0,65	0,90	116 31 62
0,32	0,65	0,90	116 31 72
0,32	0,65	0,90	116 31 82




15

0,32	0,65	0,90	116 32 32
0,32	0,65	0,90	116 32 52
0,32	0,65	0,90	116 32 62



15


0,32	0,65	0,90	116 34 32
0,32	0,65	0,90	116 34 52
0,32	0,65	0,90	116 34 62
0,32	0,65	0,90	116 34 82



15


0,32	0,65	0,90	116 34 33
0,32	0,65	0,90	116 34 53
0,32	0,65	0,90	116 34 63
0,32	0,65	0,90	116 34 83

„Baureihe E”,
M 30 x 1,5



TARA °

116 80 52



MADISON °

116 81 52


„E”,

75 °C.

Alois F. Dornbracht GmbH & Co. KG.

„Combi E”

„Combi 4”




15

. 1.65.


109 05 51, . 1.65.

- 116 60 32
- 116 60 42
- 116 60 52
- 116 60 62
- 116 60 72
- 116 60 82



15

- 116 70 32
- 116 70 42
- 116 70 52
- 116 70 62
- 116 70 72
- 116 70 82





DIN EN 1057

(1 .)

- G 1/2" x 12
- G 1/2" x 15
- G 1/2" x 16
- G 1/2" x 12
- G 1/2" x 15
- G 1/2" x 16
- G 1/2" x 12
- G 1/2" x 15
- G 1/2" x 16
- G 1/2" x 12
- G 1/2" x 15
- G 1/2" x 16
- G 1/2" x 12
- G 1/2" x 15
- G 1/2" x 12
- G 1/2" x 15


- 116 93 92
- 116 93 93
- 116 93 94
- 116 90 92
- 116 90 93
- 116 90 94
- 116 91 92
- 116 91 93
- 116 91 94
- 116 92 92
- 116 92 93
- 116 92 94
- 116 94 92
- 116 94 93
- 116 95 92
- 116 95 93

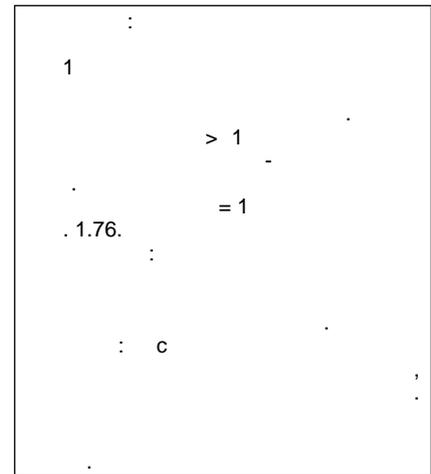


R 1/2" x Rp 1/2"

G 1/2"

- 116 75 52
- 116 75 62



116 75 52/62



15

(1 .)

- 116 95 53

Ø 15 , L = 150

, R 1/2

15

- 116 95 63

EN 10226